




Material: PC Optics UL94 clear  
Operating Temperature -60° +125°C  
ESD Protection

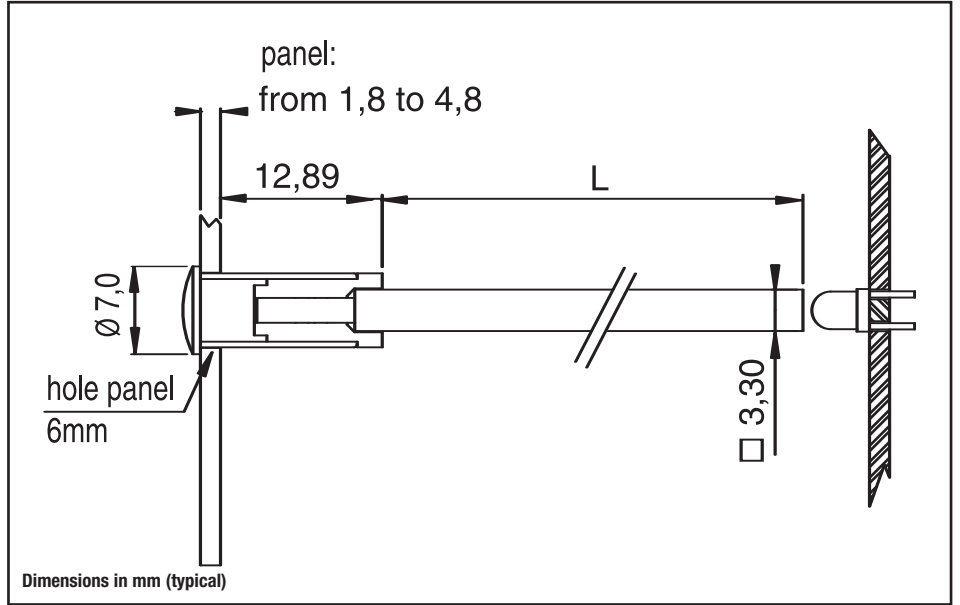

**Make up your code**

**K**

Series

**LX**

Lens

**DXXX**

Optical Spacer

Code	Color	Lens		Material
		Ø Lens (mm)	Ø Hole (mm)	
L71	Red	Ø 7	Ø 6	Transparent UL94 V-0 Operating temperature -60°C +125°C
L72	Green	Ø 7	Ø 6	
L73	Yellow	Ø 7	Ø 6	
L74	Clear	Ø 7	Ø 6	
L75	Blue	Ø 7	Ø 6	
L..	Special Color			

**Optical Spacer**

Code	Length L=mm	Code	Length L=mm	Code	Length L=mm	Code	Length L=mm
D050	5,0	D300	30,0	D550	55,0	D800	80,0
D075	7,5	D325	32,5	D575	57,5	D825	82,5
D100	10,0	D350	35,0	D600	60,0	D850	85,0
D125	12,5	D375	37,5	D625	62,5	D875	87,5
D150	15,0	D400	40,0	D650	65,0	D900	90,0
D175	17,5	D425	42,5	D675	67,5	D925	92,5
D200	20,0	D450	45,0	D700	70,0	D950	95,0
D225	22,5	D475	47,5	D725	72,5	D975	97,5
D250	25,0	D500	50,0	D750	75,0	D1000	100
D275	27,5	D525	52,5	D775	77,5	DXX	Your length

