





K



khatod.com

DIGITAL EDITION / SPRING 2026

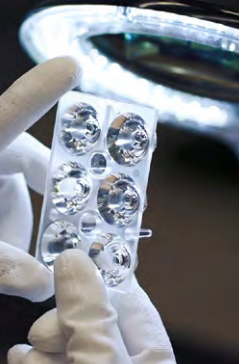

ADVANCED TECHNOLOGY UNIQUE PROJECTS READY-TO-USE



Khatod optics enable to realize your most demanding applications in LED Lighting.

Pioneer of SILICONE LENSES, unique to OPTICAL SYSTEMS, forerunner of new-concept REFLECTORS, skilled developer of CUSTOM OPTICS. To its customers, Khatod makes available its newest industrial area – 30,000sqm of advanced technology - free of charge technical support, fast deliveries from HQ, corporate sales offices around the world and global distributors of the industry.


Standard products: over 7900 models from stock – optics, optical systems and reflectors – for most popular LEDs, for any kind of applications in LED Lighting. Made from top quality materials – optical grade PMMA for HT, PC HT, ULTRA-CLEAR SILICONE (LSR) – by using exclusive manufacturing processes and superior finishing.

Custom Optics: Khatod started as manufacturer of custom optics when LED Lighting was in its early days. Since then, our lenses have been developing alongside the newest LEDs. Who can offer better expertise than Khatod? The answer is easy: nobody. Unique on the international scene, Khatod develops the entire product process 100% in-house, Milano, Italy. No outsourcing. For your new projects, do not hesitate to contact Khatod. You will find not only a manufacturer of optics, but a real partner in your project.


Since 1985, from Project to Object. 100% Made in Khatod, Italy.

Watch our corporate video 



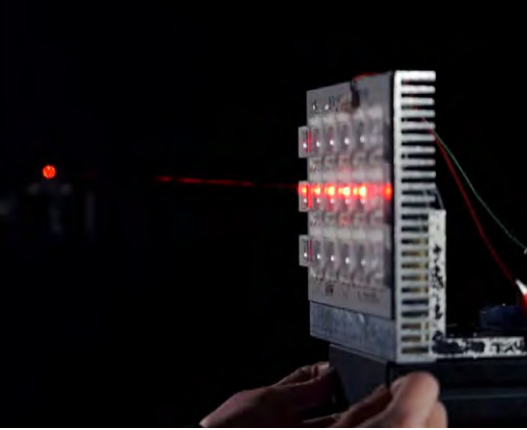


OPTICAL & MECHANICAL ENGINEERS
TOOLING MANUFACTURING
MASS PRODUCTION – STOCK

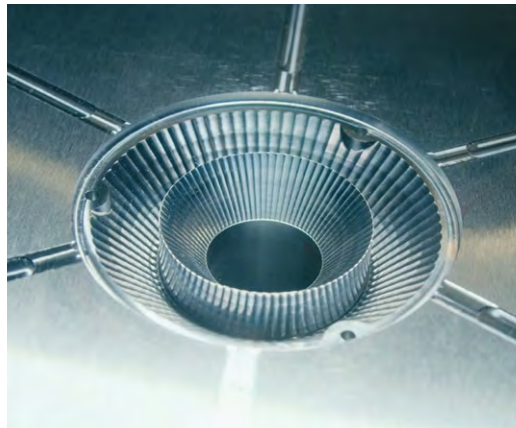

ANDROMEDA


LINEAR OPTICAL SYSTEM

MID-POWER LEDS




ANDROMEDA/METW

Full angle at 50%
from maximum: ~ 25°
Full angle at 10%
from maximum: ~ 50°




ANDROMEDA/ASTW

Peak at 25°




ANDROMEDA/WITW

Full angle at 50%
from maximum: ~ 40°
Full angle at 10%
from maximum: ~ 75°




ANDROMEDA/EWTW

Full angle at 50%
from maximum: ~ 50°
Full angle at 10%
from maximum: ~ 80°



ANDROMEDA/UWTW

Full angle at 50%
from maximum: ~ 80°
Full angle at 10%
from maximum: ~ 100°

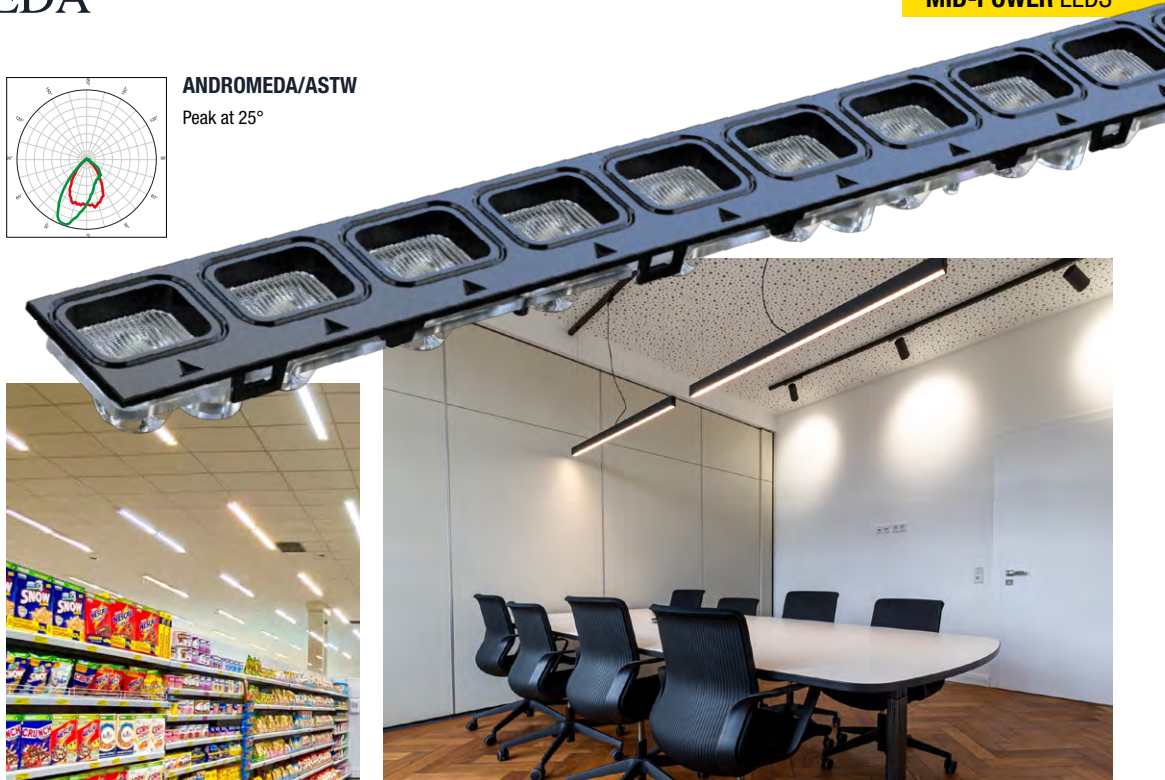


Linear optics ideal for **tunable white, offices and architectural applications**. Optimized for Mid Power LEDs, dimensions: 279.50mm x 21.00mm side x H 14.32mm. Made of optical grade PMMA, these optics work perfectly within -40° to +90° temperature range.

Beam angles: **Medium, Wide, Extra Wide, Ultra Wide, Asymmetric.**

ANDROMINI


LINEAR OPTICAL SYSTEM

MID-POWER LEDs




ANDROMINI/METW

Full angle at 50%
from maximum: ~ 25°
Full angle at 10%
from maximum: ~ 50°




ANDROMINI/WITW

Full angle at 50%
from maximum: ~ 40°
Full angle at 10%
from maximum: ~ 75°




ANDROMINI/EWTW

Full angle at 50%
from maximum: ~ 50°
Full angle at 10%
from maximum: ~ 80°



ANDROMINI/UWTW

Full angle at 50%
from maximum: ~ 80°
Full angle at 10%
from maximum: ~ 100°



ANDROMINI/ASTW

Peak at 25°





Linear optics optimized for Mid Power LEDs, dimensions: 79.50mm x 21.00mm side – 14.32mm height. Andromini are ideal for **tunable white, offices and architectural applications**. In addition to Tunable White solutions, Andromini optics are also perfectly suited for **RGBW LED applications**, offering exceptional colour mixing and uniformity.

Beam angles: **Medium, Wide, Extra Wide, Ultra Wide, Asymmetric.**


SAGITTARIO

LINEAR OPTICS MADE WITH OMP™ TECHNOLOGY

MID-POWER LEDS

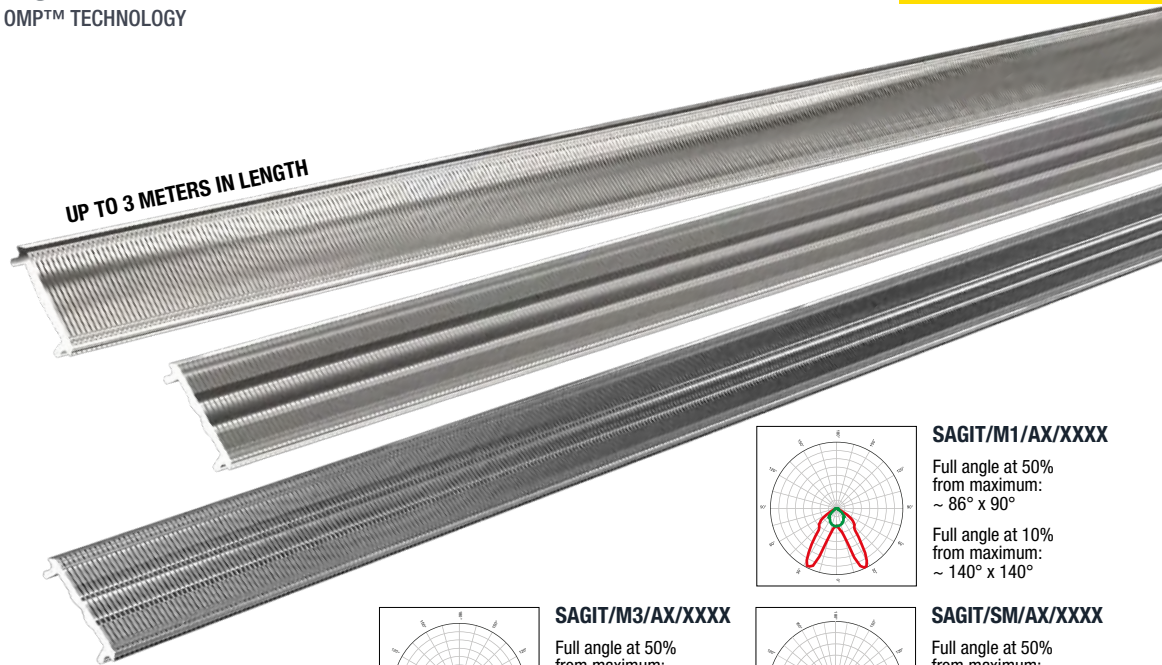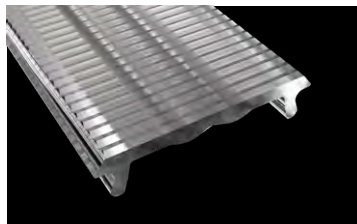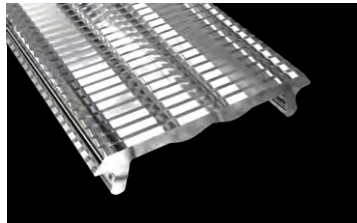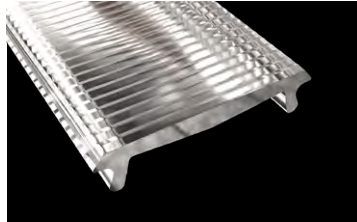


UP TO 3 METERS IN LENGTH



SAGIT/M1/AX/XXXX

Full angle at 50%
from maximum:
~ 86° x 90°


Full angle at 10%
from maximum:
~ 140° x 140°



SAGIT/M3/AX/XXXX

Full angle at 50%
from maximum:
~ 90° x 90°

Full angle at 10%
from maximum:
~ 150° x 150°



SAGIT/SM/AX/XXXX

Full angle at 50%
from maximum:
~ 90° x 90°

Full angle at 10%
from maximum:
~ 150° x 150°


Linear Optics made with **OMP™ Technology (Optical Multilayer Performance)** for all indoor environments, especially designed for supermarkets, warehouses and offices. Engineered for mid-power LEDs. Optimized for the most popular **2835** and **3030** package LEDs, in 20mm and 24 mm modules. Made of optical grade **PMMA**. Available in **three standard lengths**: 1.220mm, 1.550mm and 3.050mm. **On request, custom lengths possible.**

Beam angles: **Double Asymmetric, Single Asymmetric, 140°, 120°, 110°, 70°, 90° Uniform, 60° Low Glare** and **45°**.

SAGITTARIO


LINEAR OPTICS MADE WITH OMP™ TECHNOLOGY

MID-POWER LEDS




SAGIT/SL/AS/XXXX

Peak at 15°
Cut Off at 60°




SAGIT/M1/W7/XXXX

Full angle at 50%
from maximum:
~ 70° x 100°
Full angle at 10%
from maximum:
~ 100° x 120°




SAGIT/M3/EW/XXXX

Full angle at 50%
from maximum:
~ 60° x 80°
Full angle at 10%
from maximum:
~ 110° x 110°




SAGIT/SL/BW/XXXX

Full angle at 50%
from maximum: ~ 150°
Full angle at 10%
from maximum: ~ 180°




SAGIT/SL/GW/XXXX

Full angle at 50%
from maximum:
~ 140° x 90°
Full angle at 10%
from maximum:
~ 160° x 140°




SAGIT/M1/WI/XXXX

Full angle at 50%
from maximum:
~ 45° x 80°
Full angle at 10%
from maximum:
~ 100° x 120°




SAGIT/M1/BW/XXXX

Full angle at 50%
from maximum: ~ 150°
Full angle at 10%
from maximum: ~ 180°




SAGIT/DIF/XXXX

Full angle at 50%
from maximum:
~ 120° x 120°
Full angle at 10%
from maximum:
~ 140° x 140°




SAGIT/SL/MW/XXXX

Full angle at 50%
from maximum:
~ 110° x 100°
Full angle at 10%
from maximum:
~ 120° x 120°




SAGIT/M1/UW/XXXX


Full angle at 50%
from maximum:
~ 90° x 110°
Full angle at 10%
from maximum:
~ 140° x 150°




SAGIT/SM/UW/XXXX

Full angle at 50%
from maximum:
~ 90° x 110°
Full angle at 10%
from maximum:
~ 140° x 150°

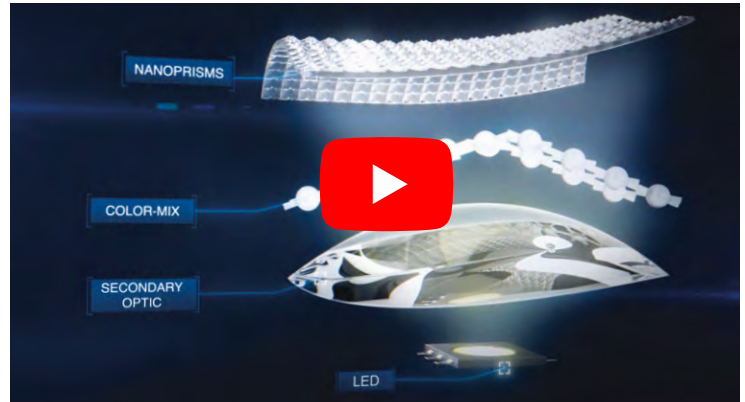





RYO/NA
Full angle at 50%
from maximum: ~ 20°
Full angle at 10%
from maximum: ~ 80°




RYO/UW
Full angle at 50%
from maximum: ~ 90°
Full angle at 10%
from maximum: ~ 150°




RYO/ME
Full angle at 50%
from maximum: ~ 30°
Full angle at 10%
from maximum: ~ 95°




RYO/WG
Peak at 5°



RYO/WI
Full angle at 50%
from maximum: ~ 45°
Full angle at 10%
from maximum: ~ 110°



RYO/WW
Peak at 15°



RYO/EW
Full angle at 50%
from maximum: ~ 55°
Full angle at 10%
from maximum: ~ 120°




RYO – one unique design, endless indoor possibilities. Defined by simplicity and balance, RYO introduces a timeless aesthetic to linear lighting. Its carefully defined geometry and the appealing surface texture give the lens a strong visual presence, elevating it from a functional element to a considered design feature. RYO optics are ideal for a wide variety of indoor settings — **from retail and hospitality interiors to modern offices and workspaces environments.** Made of optical grade PMMA and engineered for mid-power LEDs LEDs and FlexTapes. Available in **length 1.220mm and on demand even above 3 meters.**

Beam angles: **Narrow, Medium, Wide, Extra Wide, Ultra Wide, Wall Grazer, Wall Washer.**


PEGASO

LINEAR OPTICAL SYSTEM


MID-POWER LEDS



PEGASO/WI
Full angle at 50%
from maximum: ~ 40°
Full angle at 10%
from maximum: ~ 70°



PEGASO/EW
Full angle at 50%
from maximum: ~ 50°
Full angle at 10%
from maximum: ~ 90°



PEGASO/UW
Full angle at 50%
from maximum: ~ 80°
Full angle at 10%
from maximum: ~ 100°


PEGASO is a family of linear lenses designed for Mid-power LEDs, ideal for indoor architectural lighting in museums, offices, and high-end interior spaces. Each lens features a **7x1 optical cluster** with compact dimensions of **279.25mm x 40.00mm** and a **height of 20.25 mm**. Three black shade options (round, square, and louvre) provide effective glare control and seamless aesthetic integration.

Beam angles: **Wide, Extra Wide, Ultra Wide.**

11X3 STOCK & SHOP

LENS ARRAYS


MID-POWER LEDS



PLL2059AXKH

Full angle at 50%
from maximum: ~ 90°


Full angle at 10%
from maximum: ~ 105°



PLL2059WIKH

Full angle at 50%
from maximum: ~ 33°


Full angle at 10%
from maximum: ~ 64°



PLL2059EWKH

Full angle at 50%
from maximum: ~ 60°

Full angle at 10%
from maximum: ~ 90°



PLL2059UWKH

Full angle at 50%
from maximum: ~ 90°

Full angle at 10%
from maximum: ~ 120°




11x3 optics panels, made of PMMA, designed for most popular Mid-Power LEDs. Excellent optical solutions for lighting systems used in rooms with high ceilings and industrial frame. Designed to comply with **ZHAGA** mounting dimension specifications.

Beam angles: **Wide, Extra Wide, Ultra Wide, Double-Asymmetrical.**

11X3 STOCK & SHOP - BOX-SHAPE

LENS ARRAYS


MID-POWER LEDS



PLL2061AXKH

Full angle at 50%
from maximum: ~ 90°


Full angle at 10%
from maximum: ~ 105°



PLL2061WIKH

Full angle at 50%
from maximum: ~ 33°


Full angle at 10%
from maximum: ~ 64°



PLL2061EWKH

Full angle at 50%
from maximum: ~ 60°




Full angle at 10%
from maximum: ~ 90°



PLL2061UWKH

Full angle at 50%
from maximum: ~ 90°

Full angle at 10%
from maximum: ~ 120°

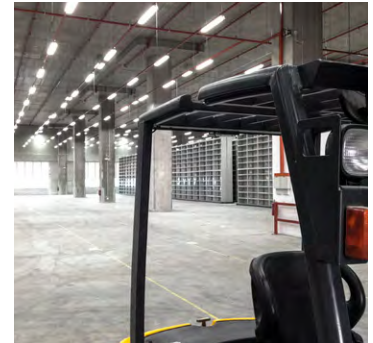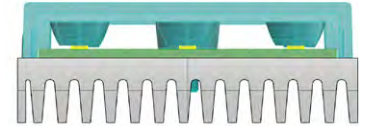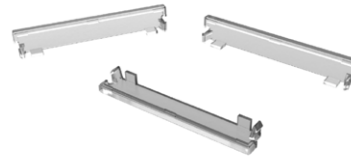



The module edge is as high as the height determined by the lenses forming the array - 7.17mm to 12.07mm - giving the module a box shape. This makes Stock & Shop even more compact, **robust** and efficient while enabling the housing to be extremely flat. Dimensions: **286.00mm x 60.00mm side**; 7.17 mm to 12.07mm height. Lighting efficiency: **over 85%**.

Beam angles: **Wide, Extra Wide, Ultra Wide, Double-Asymmetrical.**


PIXEL 11X3

REFLECTOR ARRAYS


MID-POWER LEDS

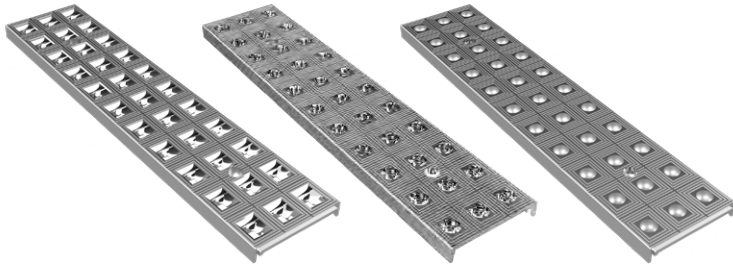


KCLPL2161AS
Full angle C0-C180
@ Max Candela: ~ 30°




KCLPL2161AX
Full angle C0-C180
@ Max Candela: ~ 30°



KCLPL2161EW
Full angle at 50%
from maximum: ~ 90°
Full angle at 10%
from maximum: ~ 110°



KCLPL2161WI
Full angle at 50%
from maximum: ~ 60°
Full angle at 10%
from maximum: ~ 90°



KCLPL2161ME
Full angle at 50%
from maximum: ~ 30°
Full angle at 10%
from maximum: ~ 70°




Reflector panels made of 33 cavities, box-shaped, designed for Mid Power LEDs and to comply with low UGR.
Module dimensions: **285.60mm x 61mm side**, 10.25mm height only. Designed to comply with **ZHAGA** mounting dimension specifications.

Beam angles: **Wide, Extra Wide, Asymmetrical, Double-Asymmetrical.**


SUPERLINEA IP / SUPERLINEA SNAP-IN

LINEAR LENSES


MID-POWER LEDs




PLL2091AS
Full angle at 50% from maximum: ~ 30°
Full angle at 10% from maximum: ~ 90°




PLL2091EW
Full angle at 50% from maximum: ~ 60°
Full angle at 10% from maximum: ~ 100°




PLL2091AX
Full angle at 50% from maximum: ~ -30/+30°
Full angle at 10% from maximum: ~ 90°



PLL2091UW
Full angle at 50% from maximum: ~ 90°
Full angle at 10% from maximum: ~ 100°



PLL2091WI
Full angle at 50% from maximum: ~ 30°
Full angle at 10% from maximum: ~ 90°

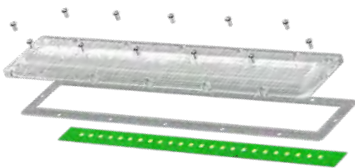

LINEAR LENSES 40mm x 284mm. They ARE NOT extrusion process manufactured. Designed for Mid-Power LEDs assembled in linear arrays, they are optimized for the most popular ZHAGA mid-power 20 and 24 mm wide PCBs. Made of PMMA, achieve 89% lighting efficiency. The special Fresnel surface texture enables enhanced glare control, making SUPERLINEA LENSES excellent in any application requiring a substantial glare reduction. SUPERLINEA SNAP-IN are provided with clips enabling either direct assembly onto the PCB or onto the profiles.

Beam angles: 30°, 60°, 90°, 20° Asymmetrical, ± 20° Asymmetrical.



16 square module
49.5mm side

32 optics




48 optics



64 optics




DOWNLOAD CATALOGUE

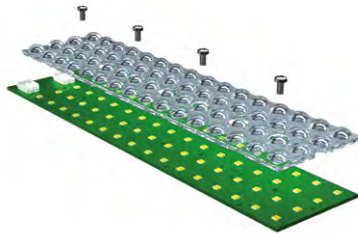

FLEX LENS – ready to use multi-lens array available in 4 different sizes: **16 optics** (49.5mm x 49.5mm), **32 optics** (49.5mm x 100.3mm), **48 optics** (49.5mm x 151.1mm) and **64 optics** (49.5mm x 201.9mm) all with 12.5mm pitch. This series covers, with a large variety of models, street lighting application as well as industrial lighting, sports lighting and in general any wide area lighting application. Made of optical grade clear **PMMA** the Flex Lens family is UV protected and the average optical efficiency exceeds 90%. **IP Version on request.** Layout compliant with **ZHAGA book 15** circuit boards.




Ø 284mm



PLL2215EL

Full angle at 50% from maximum: ~ 33° x 120°


Full angle at 10% from maximum: ~ 90° x 145°



PLL2215EW

Full angle at 50% from maximum: ~ 60° x 130°


Full angle at 10% from maximum: ~ 150° x 160°



PLL2215UW

Full angle at 50% from maximum: ~ 85° x 120°


Full angle at 10% from maximum: ~ 95° x 155°



PLL2331EW

Full angle at 50% from maximum: ~ 60°

Full angle at 10% from maximum: ~ 120°



PLL2331UW

Full angle at 50% from maximum: ~ 87°

Full angle at 10% from maximum: ~ 145°

DESIGNED TO COMPLY WITH



IP68



IK10


STRATOS are high-tech lenses designed for high bay applications, with a special focus on warehouses. The elliptical beam is the core project of Stratos family, unique on the market for this kind of applications. Comparative tests we carried out with homologous models from the market, prove that Stratos lenses perform up to 37% more lux (average value) on the floor and up to 47% more uniformity in front of the shelves.

Beam angles: **60°**, **90°**, **Elliptical**.

PL1672 SERIES


SINGLE LENSES

HIGH-POWER LEDS




PL1672UN

Full angle at 50%
from maximum: ~ 3°
Full angle at 10%
from maximum: ~ 8°



PL1672NA

Full angle at 50%
from maximum: ~ 10°
Full angle at 10%
from maximum: ~ 19°



PL1672ME

Full angle at 50%
from maximum: ~ 28°
Full angle at 10%
from maximum: ~ 40°





KE1672

Holder for PL1672 Series
Available on request
with self-tape




Single Lenses for Power LEDs, **35,00mm diameter - 20,71mm height** - MR11 Standard. Material: **PMMA**.
Benefits: LED Chip Projection on target totally eliminated; Clean Spot, Efficiency > 89%; Optical Grade PMMA; 3 Pins provided for precise and robust mounting.
CBCP (Center Beam Candle Power) = 150 cd/Im. Smallest Shape Factor Lens (Diameter × FWHM / ChipSize).

Beam angles: **Ultra Narrow 3.5°, Narrow, Medium.**

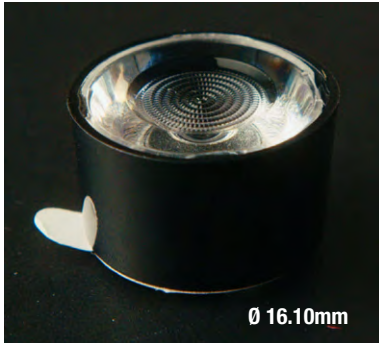


JOY/NA01SA

Full angle at 50%
from maximum: ~ 15°
Full angle at 10%
from maximum: ~ 30°




JOY/WI01SA

Full angle at 50%
from maximum: ~ 40°
Full angle at 10%
from maximum: ~ 60°



JOY/ME01SA

Full angle at 50%
from maximum: ~ 25°
Full angle at 10%
from maximum: ~ 45°



JOY/EW01SA

Full angle at 50%
from maximum: ~ 55°
Full angle at 10%
from maximum: ~ 75°




Family of **mini lenses** made of **PMMA** with a **diameter of 16.1 mm**, perfect for all types of micro-spotlights. Reflecting market trends, we have made these mini lenses which, despite their “micro” size, deliver exceptional performance comparable to that of a macro-lenses. These lenses are compatible with all **LED types up to 5050 package size**, making them a versatile solution for illuminating a wide variety of environments, from offices and shops to architectural spaces, wherever a “micro” optical solution is required. The lenses are easily assembled by adhesive **tape fixing**.

Beam angles: **Narrow, Medium, Wide and Extra Wide.**




Ø 26mm




PLL2261SAUN

Full angle at 50%
from maximum: ~ 10°
Full angle at 10%
from maximum: ~ 19°




PLL2261SANA

Full angle at 50%
from maximum: ~ 12°
Full angle at 10%
from maximum: ~ 24°




PLL2261SAME

Full angle at 50%
from maximum: ~ 19°
Full angle at 10%
from maximum: ~ 31°




PLL2261SAWI

Full angle at 50%
from maximum: ~ 38°
Full angle at 10%
from maximum: ~ 55°



PLL2261SAEL

Full angle at 50%
from maximum:
~ 11° x 32°
Full angle at 10%
from maximum:
~ 21° x 48°



PLL2261SAEL90

Full angle at 50%
from maximum:
~ 32° x 11°
Full angle at 10%
from maximum:
~ 48° x 21°



Family of Single-Lenses made of **PMMA** for outdoor and indoor lighting applications. Diameters of **21.60 mm** and **26.00 mm**, optimized for the most popular **3535** package LEDs but can also be used with **5050** package LEDs. The Lenses are easily assembled by adhesive **tape fixing**.

Beam angles: **Ultra Narrow, Narrow, Medium, Wide and two Elliptical versions.**


SILVER JUNIOR

SINGLE LENSES

HIGH-POWER LEDS




Ø 21.6mm




PLL2269SAUN

Full angle at 50%
from maximum: ~ 10°
Full angle at 10%
from maximum: ~ 17°




PLL2269SANA

Full angle at 50%
from maximum: ~ 16°
Full angle at 10%
from maximum: ~ 27°




PLL2269SAME

Full angle at 50%
from maximum: ~ 25°
Full angle at 10%
from maximum: ~ 40°



PLL2269SAWI

Full angle at 50%
from maximum: ~ 40°
Full angle at 10%
from maximum: ~ 60°




PLL2269SAEL1

Full angle at 50%
from maximum:
~ 10° x 45°
Full angle at 10%
from maximum:
~ 20° x 60°




PLL2269SAEL190

Full angle at 50%
from maximum:
~ 45° x 10°
Full angle at 10%
from maximum:
~ 60° x 20°




PLL2269SAEL2


Full angle at 50%
from maximum:
~ 10° x 55°
Full angle at 10%
from maximum:
~ 20° x 80°



PLL2269SAEL290


Full angle at 50%
from maximum:
~ 55° x 10°
Full angle at 10%
from maximum:
~ 80° x 20°

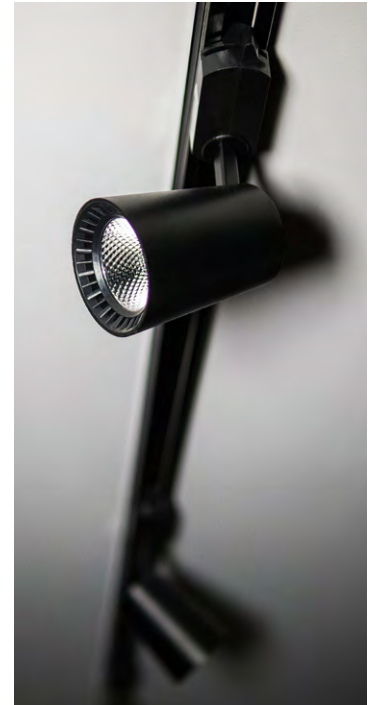




VIA2X3/5050R100
FWHM 100°
Round Beam

Full angle at 50% from maximum: ~ 100°
Full angle at 10% from maximum: ~ 120°




VIA2X3/5050T2MC
IESNA Type II
Medium

Full angle at 50% from maximum: ~ 150° x 70°
Full angle at 10% from maximum: ~ 165° x 106°




VIA2X3/5050R60
FWHM 60°

Full angle at 50% from maximum: ~ 60°
Full angle at 10% from maximum: ~ 90°




VIA2X3/5050T3
IESNA Type III
Medium

Full angle at 50% from maximum: ~ 150° x 55°
Full angle at 10% from maximum: ~ 170° x 95°




VIA2X3/5050R50
FWHM 50°

Full angle at 50% from maximum: ~ 50°
Full angle at 10% from maximum: ~ 65°




VIA3X8/T2MC
IESNA Type II
Medium

Full angle at 50% from maximum: ~ 150° x 70°
Full angle at 10% from maximum: ~ 165° x 106°



VIA2X3/5050S100
FWHM 100°
Square Beam

Full angle at 50% from maximum: ~ 100°
Full angle at 10% from maximum: ~ 120°

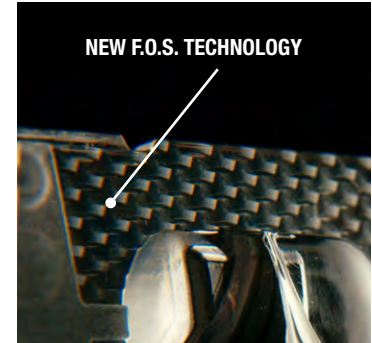

VIA lenses have been designed for street lighting applications. Thanks to the **FULL OPTICAL SURFACE TECHNOLOGY** (Measured efficiencies > 95%), Khatod is taking advantage of all light dispersed between lenses in a cluster, directing it towards the street. The pattern between each lens is carefully engineered to extract all light, which is usually lost.

NACTUS 2x2

4 Optics - 25,40mm Lens pitch
Dimensions: 50mm side



NACTUS 6

6 Optics
Dimensions: 50mm side



NACTUS 4x2

8 Optics - 25,40mm Lens pitch
Dimensions: 118.80mm x 71.40mm side



NACTUS 6x2

12 Optics - 25,40mm Lens pitch
Dimensions: 173mm x 71.4mm side




NACTUS 6x2 SIL

12 Optics
Dimensions: 168.78mm x 68.18mm side



NACTUS SMILE

12 Optics - From 6mm to 8mm height
Dimensions: 110mm diameter

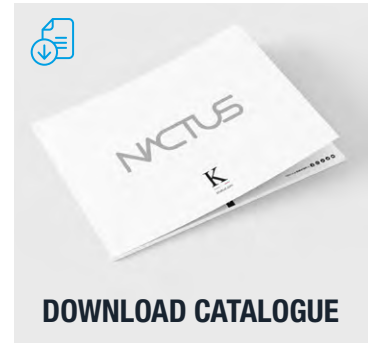

DOWNLOAD CATALOGUE

First and unique optical system using different optics with different geometries, combined and set together in the same system. Any shape, any lighting pattern, any configuration can be realized thanks to its specific optical design that makes NACTUS special and unique.



PATENTED SYSTEM



110x120mm



DOWNLOAD CATALOGUE




Design and production of optical systems for LEDs dedicated to sports facilities of any size and range (ideal for applications where **homogeneity, low-glare and efficiency are required**), available various light beams and made with the best raw materials.

SNAIL

SILICONE LENS FOR WHITE AND COLOR LEDS FOR WINDOWS AND DOORS ILLUMINATION

HIGH-POWER LEDS



PLL2203SR

Full angle at 50% from maximum: $\sim 4^\circ \times 120^\circ$

Full angle at 10% from maximum: $\sim 13^\circ \times 150^\circ$



PLL2203SR Lens enables to illuminate windows and doors by emphasizing the frame structure thanks to its excellent blade-shaped beam. Optical design ensures high performance, while its compact size and snail shape make it unobtrusive and elegant. Perfect for **architectural lighting**, outdoor and indoor. Available with holder. When assembling the parts, the LEDs must be lined up in a single row under the lens. Mounted at the centre of the bottom or top or side edge of windows or doors, it creates a great graphic lighting effect and enables to customize the illumination of the applied environment. Made of **LSR silicone**, ensures great resistance to water and powder penetration, to impacts and extreme temperatures.


MULTICOLOR

SILICONE LENSES FOR TUNABLE WHITE AND FULL COLOR APPLICATIONS

HIGH-POWER LEDs




Ø 80mm



KEPLL2066NASR

Full angle at 50%
from maximum: ~ 6.3°
Full angle at 10%
from maximum: ~ 11.3°




KEPLL2066WISR

Full angle at 50%
from maximum: ~ 33°
Full angle at 10%
from maximum: ~ 43°




CUSTOMIZE YOUR COLORS! The wide variety of LEDs currently available on the market enables to customize the LED clusters with multiple colors. PLL2066xxSR lens from Khatod allows to use clusters consisting of up to 9 LEDs with **2x2mm case**. The customers are given the opportunity to choose the color that best meets their requirements and make the difference with the standard proposals. PLL2066xxSR lens is high performing and guarantees excellent light output even with clusters made from 4 or 6 LEDs.


Beam angles: **Narrow, Wide.**




PL135910
19,70 mm diameter
9,96 mm height
Narrow Beam Lens




PL135920
19,70 mm diameter
10,25 mm height
Medium Beam Lens



PL135936
19,70 mm diameter
10,42 mm height
Wide Beam Lens



PL135960
19,70 mm diameter
10,60 mm height
Extra Wide Beam Lens



PL1359EL
19,70 mm diameter
10,52 mm height
Elliptical Beam Lens




Modular systems based on a variety of holders from **1 to 16** housings, available with round, square and linear shape able to accommodate reflectors and lenses of different beams. Allow diverse configurations and offer a “plug-and-play” functionality whereby MODULARIS is ready for use within **few seconds**. Any applications in general lighting.

Beam angles: **Narrow, Medium, Wide, Extra Wide, Elliptical.**




Ø 49.90mm




AURORA50/NA

Full angle at 50%
from maximum: ~ 10°
Full angle at 10%
from maximum: ~ 20°




AURORA50/ME

Full angle at 50%
from maximum: ~ 20°
Full angle at 10%
from maximum: ~ 35°




AURORA50/WI

Full angle at 50%
from maximum: ~ 40°
Full angle at 10%
from maximum: ~ 70°



AURORA50/EW

Full angle at 50%
from maximum: ~ 55°
Full angle at 10%
from maximum: ~ 100°



AURORA50/UW


Full angle at 50%
from maximum: ~ 70°
Full angle at 10%
from maximum: ~ 100°

AURORA is a versatile lens family with a diameter of **49.90mm – 13.50mm height**. Designed to bring clarity, balance, and elegance to COB LED lighting. Conceived for COB LEDs with **LES ranging from 4mm to 13mm** in diameter. It can be integrated into any luminaire design with interchangeable PC holders available in White, Black, or Clear, offering both aesthetic flexibility and reliable mechanical stability. Compatible with white, Tunable White and Dim-to-Warm COB LEDs - fully compliant with **Zhaga Book 10 Connectors**.

Beam angles: **Narrow, Medium, Wide, Extra Wide, Ultra Wide.**




Ø 35mm and Ø 50mm




**FLORA35/ME
FLORA50/ME**

Full angle at 50%
from maximum: ~ 20°
Full angle at 10%
from maximum: ~ 50°



**FLORA35/WI
FLORA50/WI**

Full angle at 50%
from maximum: ~ 35°
Full angle at 10%
from maximum: ~ 60°



**FLORA35/EW
FLORA50/EW**

Full angle at 50%
from maximum: ~ 60°
Full angle at 10%
from maximum: ~ 80°




FLORA is the family of single lenses with a **diameter of 35mm and 50mm**. These lenses are conceived for COB LEDs with **LES ranging from 6mm to 13.5mm** in diameter. They can be used with all kinds of COBs: white, Tunable White and Dim to Warm. Made of optical grade PMMA, these optics work perfectly within the temperature range of -40° Celsius to +90° Celsius. They are available in three variants of holder (made of polycarbonate): White, Black and Clear - **Twist and Lock assembly on Zhaga Book 10 Connectors**.

Beam angles: **Medium, Wide and Extra Wide.**





GRACE35/WOW

Ø 35mm
Full Beam



GRACE35
GRACE50

Ø 35mm and Ø 50mm
Full Beam

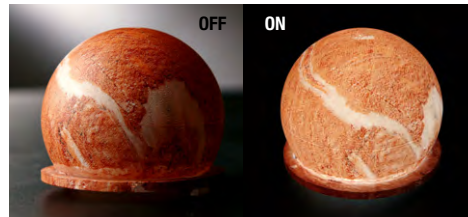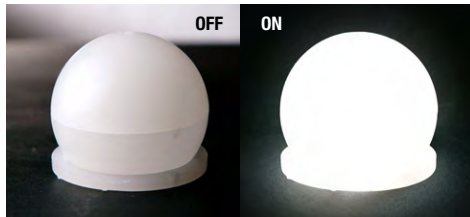

GRACE35/SEMI
GRACE50/SEMI

Ø 35mm and Ø 50mm
Full Beam

GRACE is the revolutionary optical diffuser **Ø 35mm and 50mm** for COB LEDs.

Embrace the uniqueness of its exclusive design with **personalized finishing**, ensuring effortless assembly and **immediate usability**.

Made of **PC**, conform to **Zhaga Standards** and tailored for indoor spaces, their adaptability extends further with customizable shapes and finishes upon request.

FRESNEL LENSES / AUTOFOCUS

FRESNEL LENSES FOR COB LEDES

COB LEDES



Fresnel: Refractive optics; special design: two off axis Fresnel lenses fixed together in one piece, through an only molding process. Avoid to perceive the real image of the light source while allowing to just see a perfect round beam. Available in many models for use with one LED or multiple LEDs. Available in different diameters.

Autofocus: full range of Color Mixing Optics, equipped with moving lenslet array, \square 45mm, to be mounted on top of the lens. Allow ZOOM and AUTOFOCUS applications in a range of beam angles from 11° to 45° . Preserve a perfect color mixing and a high optical efficiency in the full range of the beam angles.

SIO3

SILICONE LENSES FOR COB LEDs

COB LEDS




DESIGNED TO COMPLY WITH



IP68




IK10




PL1764SR

Full angle at 50% from maximum: ~ 155° x 155°
Full angle at 10% from maximum: ~ 165° x 165°




PL1765SR

Full angle at 50% from maximum: ~ 150° x 135°
Full angle at 10% from maximum: ~ 145° x 160°




PL1766SR

Full angle at 50% from maximum: ~ 145° x 155°
Full angle at 10% from maximum: ~ 170° x 165°




PL1771SR

Full angle at 50% from maximum: ~ 150° x 155°
Full angle at 10% from maximum: ~ 165° x 165°




PL1772SR-075

Full angle at 50% from maximum: ~ 140° x 155°
Full angle at 10% from maximum: ~ 150° x 165°




PL1772SR

Full angle at 50% from maximum: ~ 140° x 155°
Full angle at 10% from maximum: ~ 150° x 165°




PL1824SR

Beam angle: 60°




PL1825SR

Beam angle: 90°



PL1845SR

Beam angle: 120°

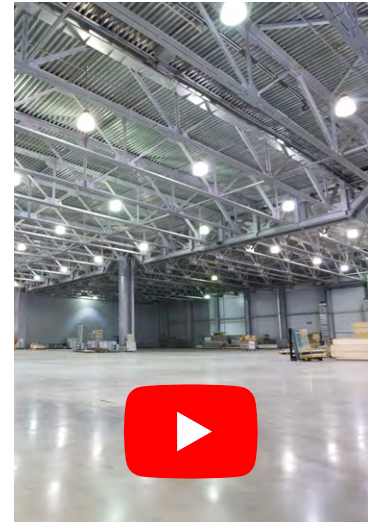

130mm diameter, made of **Ultra-Clear LSR** (Liquid Silicone Rubber). Optimized for COB LEDs with LES 19mm to 30mm; high optical efficiency; extreme temperature resistant, -40°C to 150°C, with peaks up to 200°C. UV-resistant, non-yellowing. Available with aluminum ring.

9 versions available.


SIO3 JR

SILICONE LENSES FOR COB LEDs

COB LEDs




Ø 85.09mm




PLL2087NASR

Full angle at 50% from maximum: ~ 25°
Full angle at 10% from maximum: ~ 45°




PLL2087UNSR

Full angle at 50% from maximum: ~ 15°
Full angle at 10% from maximum: ~ 30°




PLL2056SR00

Full angle at 50% from maximum: ~ 82° x 128°
Full angle at 10% from maximum: ~ 147° x 152°




PLL2056SR11

Full angle at 50% from maximum: ~ 110° x 160°
Full angle at 10% from maximum: ~ 155° x 170°




PLL2056SR22

Full angle at 50% from maximum: ~ 110° x 160°
Full angle at 10% from maximum: ~ 140° x 170°




PLL2056SR33

Full angle at 50% from maximum: ~ 75° x 160°
Full angle at 10% from maximum: ~ 150° x 175°




PLL2056SR44

Full angle at 50% from maximum: ~ 150° x 160°
Full angle at 10% from maximum: ~ 170° x 170°




PLL2056SR55

Full angle at 50% from maximum: ~ 125° x 165°
Full angle at 10% from maximum: ~ 175° x 175°




PLL2056SR66

Full angle at 50% from maximum: ~ 70° x 135°
Full angle at 10% from maximum: ~ 130° x 160°




PLL2056SR77

Full angle at 50% from maximum: ~ 60°
Full angle at 10% from maximum: ~ 130°



PLL2056SR88

Full angle at 50% from maximum: ~ 90°
Full angle at 10% from maximum: ~ 130°




PLL2056SR99


Full angle at 50% from maximum: ~ 45°
Full angle at 10% from maximum: ~ 80°

New diameter 90mm, made of Ultra-Clear LSR (Liquid Silicone Rubber). Optimized for COB LEDs with LES 9 to 23mm. The rotosymmetric versions work well also with COB LES of 23mm. Boast the well-known performances of the silicone lenses from Khatod: excellent transparency, high optical efficiency, resistance and flexibility in a wide temperature range, UV-resistant, etc.


14 versions available.




KESQ1909CR
 Full angle at 50%
 from maximum: ~ 24°
 Full angle at 10%
 from maximum: ~ 71°
35mm Ø




KESQ1936CR
 Full angle at 50%
 from maximum: ~ 30°
 Full angle at 10%
 from maximum: ~ 75°
50mm Ø




KESQ1910CR
 Full angle at 50%
 from maximum: ~ 55°
 Full angle at 10%
 from maximum: ~ 99°
35mm Ø




KESQ1937CR
 Full angle at 50%
 from maximum: ~ 52°
 Full angle at 10%
 from maximum: ~ 92°
50mm Ø




KESQ1912CR
 Full angle at 50%
 from maximum: ~ 30°
 Full angle at 10%
 from maximum: ~ 75°
35mm Ø




KESQ1934CR
 Full angle at 50%
 from maximum: ~ 12°
 Full angle at 10%
 from maximum: ~ 21°
50mm Ø




KESQ1938CR
 Full angle at 50%
 from maximum: ~ 68°
 Full angle at 10%
 from maximum: ~ 100°
50mm Ø



KESQ1933CR
 Full angle at 50%
 from maximum: ~ 42°
 Full angle at 10%
 from maximum: ~ 90°
35mm Ø





KESQ1935CR
 Full angle at 50%
 from maximum: ~ 18°
 Full angle at 10%
 from maximum: ~ 40°
50mm Ø




KESQ1939CR
 Full angle at 50%
 from maximum: ~ 75°
 Full angle at 10%
 from maximum: ~ 100°
50mm Ø

Single reflectors made of optical grade **PC** specific for high temperature resistance, up to 120°C. High-performing, multi-functional, easy to use. Available in three diameters: **32.39mm, 34.99mm, 49.91mm**. Fastening with **adhesive tape**. Perform an excellent luminous flux and uniform light distribution.


10 versions available.

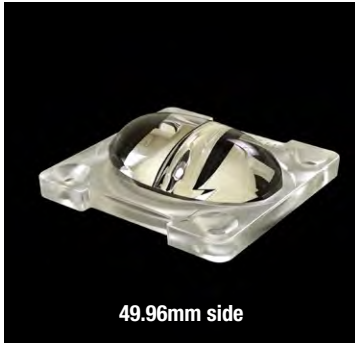


PLAL0111
60° FWHM
Full angle at 50% from maximum: ~ 60°
Full angle at 10% from maximum: ~ 75°




PLAL0122
90° FWHM
Full angle at 50% from maximum: ~ 90°
Full angle at 10% from maximum: ~ 95°




PLAL0133
IESNA Type I
Full angle at 50% from maximum: ~ 150° x 90°
Full angle at 10% from maximum: ~ 160° x 100°




PLAL0144
IESNA Type II
Full angle at 50% from maximum: ~ 160° x 120°
Full angle at 10% from maximum: ~ 175° x 145°




PLAL0155
IESNA Type III
Full angle at 50% from maximum: ~ 160° x 130°
Full angle at 10% from maximum: ~ 175° x 155°



PLAL0166
IESNA Type V
Full angle at 50% from maximum: ~ 145°
Full angle at 10% from maximum: ~ 155°



PLAL0177
ME3A
Full angle at 50% from maximum: ~ 155° x 120°
Full angle at 10% from maximum: ~ 165° x 140°



PLAL0188
120° Square
Full angle at 50% from maximum: ~ 120°
Full angle at 10% from maximum: ~ 130°


Beams referred to GAIA ONE. Single lens modules - **49,96 mm side** – made of **PMMA-HT** resistant up to 125°C . New addition to the Gaia Optical Systems family. Created to meet the requirements of LED Lighting users for high efficient single lenses enabling great illuminance in small footprint applications. On request, available with gasket for **IP65**.

Beam angles: **60° , 90° , 120° Square, IESNA Type I, IESNA Type II, IESNA Type III, IESNA Type V, ME3A.**

KESQ2145


SILICONE SINGLE LENS FOR UV LEDS

UV LEDS




KESQ2145NASR

Full angle at 50%
from maximum: ~ 7.4°
Full angle at 10%
from maximum: ~ 15.2°








KESQ2145MESR

Full angle at 50%
from maximum: ~ 25.0°
Full angle at 10%
from maximum: ~ 35.6°



KESQ2145WI

Full angle at 50%
from maximum: ~ 41.1°
Full angle at 10%
from maximum: ~ 53.2°




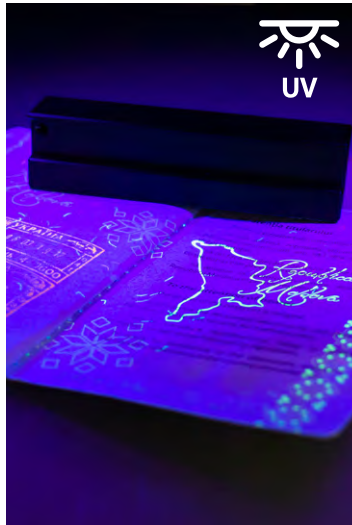


Silicone Single Lenses with Self-Adhesive Tape for UV LEDs with Black Holder.

Beam angles: **Narrow, Medium, Wide.**

IMAGING AND SENSOR


OVER 7900 MODELS AVAILABLE

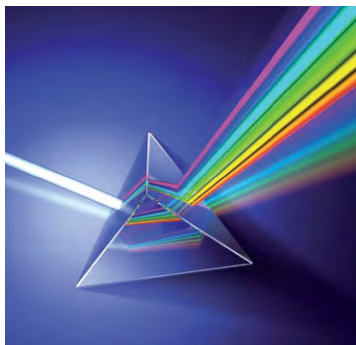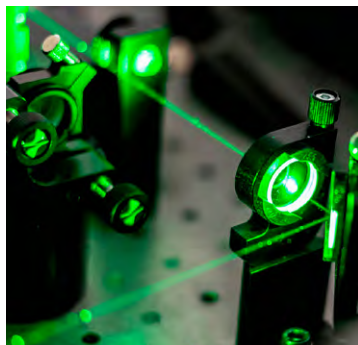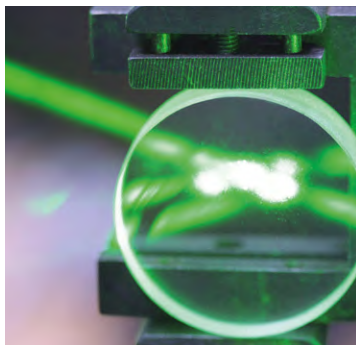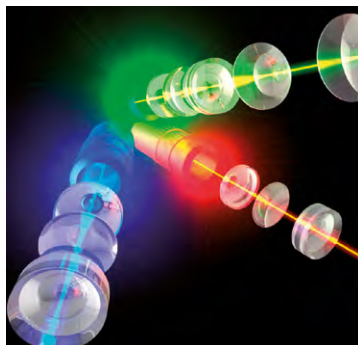



KHATOD

K



khatod.com

We Manufacture Solutions

Follow us as **Khatod Opto** on



HEADQUARTERS

Via Alessandrina 25, Cusano Milanino, (Milan) Italy - Phone +39 02 66013695 - Fax +39 02 66013500 - khatod@khatod.com - www.khatod.com

USA

khatodusa@khatod.com

INDIA

khatodindia@khatod.com