

Via Monfalcone 41
20092 Cinisello Balsamo (Milano) – Italy
Tel. +39 0266013695 – Fax +39 0266013500

MODEL NO: PL1172 series

SUBJECT: **LED 1-3-5W – Lens Coupling - Output Luminous Intensity Measurement**




PL1172 Series FLUX-LENS - Fresnel System

- High efficiency
- Autofocus Lens
- For AR111 systems

Typical applications are

- Architectural lighting
- Lamps
- Street lights

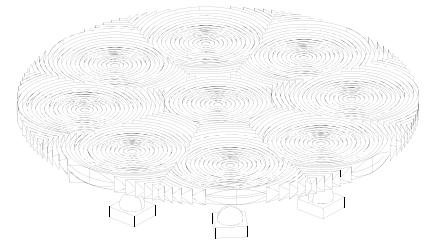

DESCRIPTION:

Verification of Luminous Intensity with coupling conditions between Khatod Fresnel lenses and 1W White Lambertian LEDs.

REPORT:

From 1 m ± 0,02 distance, we have measured Luminous Intensity emitted by LED.
Such measurements have been repeated with the same test conditions but coupling LEDs to the lens Khatod cod. PL1172

MEASURED DATA:


Column 1 shows p/n of the Lenses, column 2 shows Luminous Intensity detected measuring LEDs without lens, column 3 shows Luminous Intensity detected on LEDs coupled with lens, column 4 shows the difference (X*) between col. 2 and col. 3

Lens Type	LED Lux from 1 Mt (ftc From 1 Mt)	LED + lens Lux from 1Mt (ftc From 1 Mt)	X*
PL1172 (10°)	198 (18,27 ftc)	2491 (229,90 ftc)	13
PL1172 (30°)	198 (18,27 ftc)	1162 (107,24 ftc)	6
PL1172 (60°)	198 (18,27 ftc)	586 (54,08 ftc)	3


Test carried out after 5 min. of operation of the LED to 350 mA ~ , local power source **GOSSON KONSTANTER** mod 3226-K118
Measurements carried out with Luxometer mod LUX-1337 of **ISO-TEC** and **MINOLTA** mod LS – 150

* X is the value of the measurement of the LED brightness at 1 meter distance, without optic devices applied to the LED.


White LED Illuminance Chart

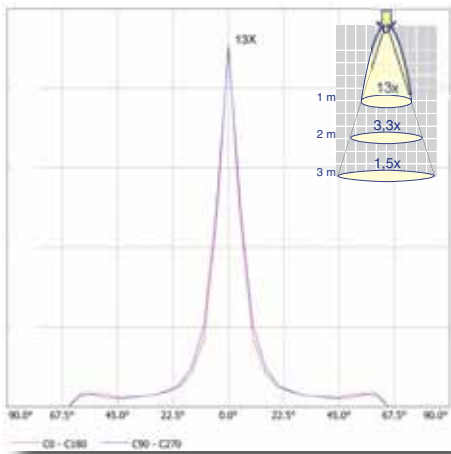

PL1172 - 10°

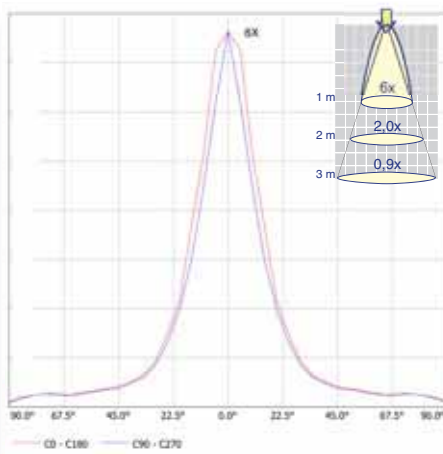

PL1172 - 30°

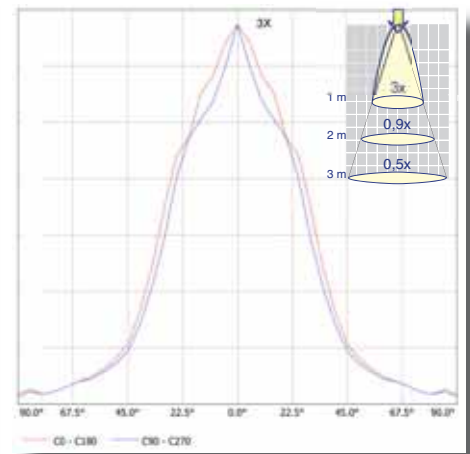

PL1172 - 60°

* X is the value of the measurement of the LED brightness at 1 meter distance, without optic devices applied to the LED.

Test conditions:

Test current: 350 mA / LED


Room Luminous Intensity : 0 Lumen

Room Temperature: 23° C

LED temperature after 10 min. : ~ 42 °C


The diagram demonstrates the performance of Khatod lenses

PL1172 Fresnel Fluxlens : Operation

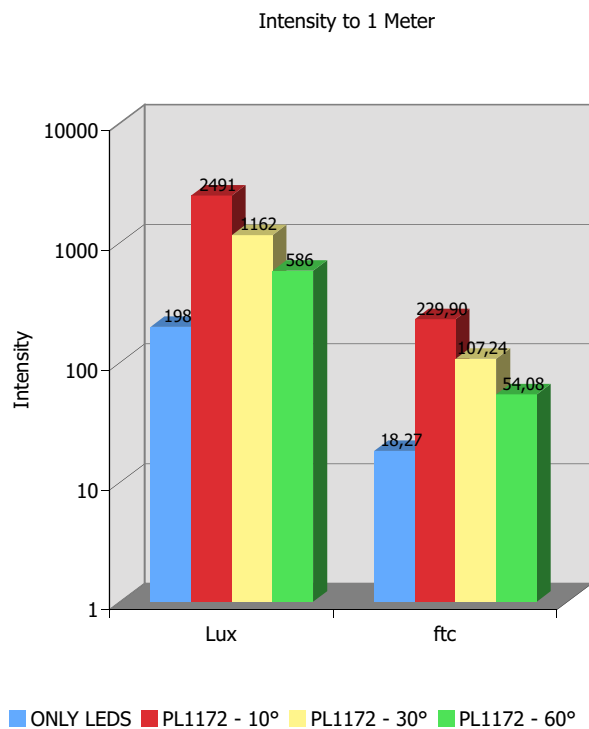


Fresnel Technology allows a perfect and uniform light flux avoiding to see the LED light spots separately. The final result is the perception of a unique light source even if it is produced by 9 LEDs. Another great benefit of Fluxlens is that it allows to obtain a wide range of different focus. On page 3 of the present Test Report you can find the focus we recommend in order to achieve light beams of 10°, 30° and 60°. Fluxlens is an autofocus lens which allows to perform a great variety of focus beams, from 8-10° to 60-80°, by increasing or decreasing the focus height.


Photos:

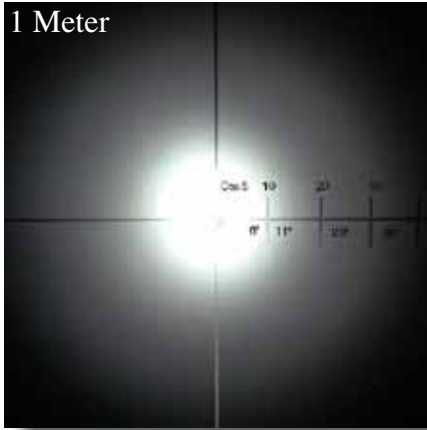


PL117206 (10°)

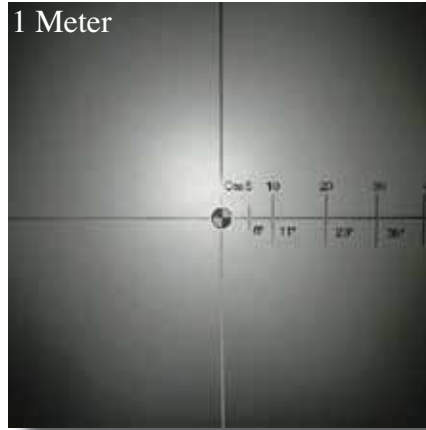


PL117225 (25°)

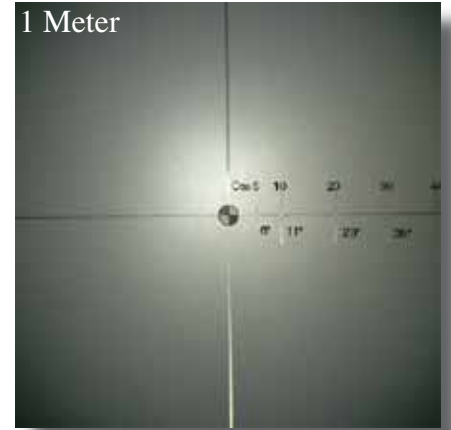


PL1172 - 60°

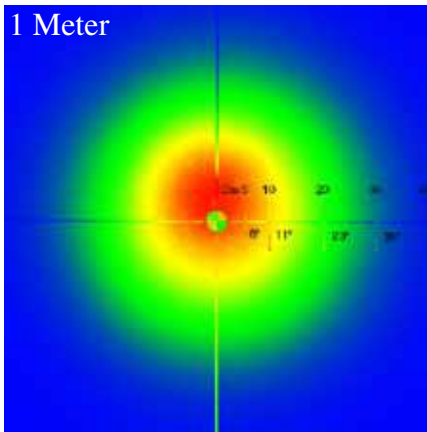

PL1172 - 10°
Spectro Metric Analysis

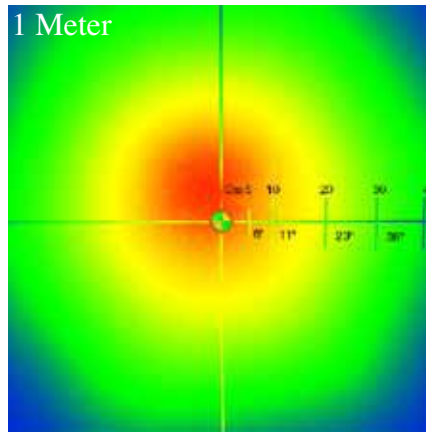


PL1172 - 30°
Spectro Metric Analysis

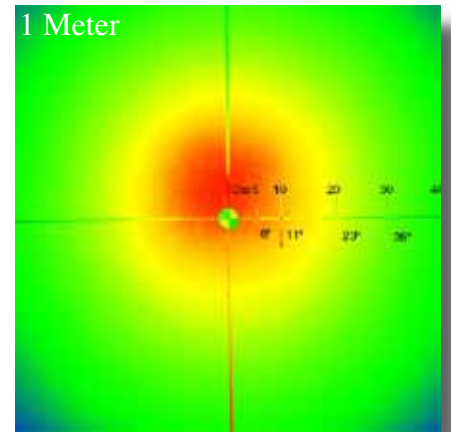

PL1172 - 60°
Spectro Metric Analysis

Measurements carried out with Luxometer mod LUX-1337. Room Luminous Intensity: 0 Lumen. Camera mod. Fujifilm S7000

Recommended Focus

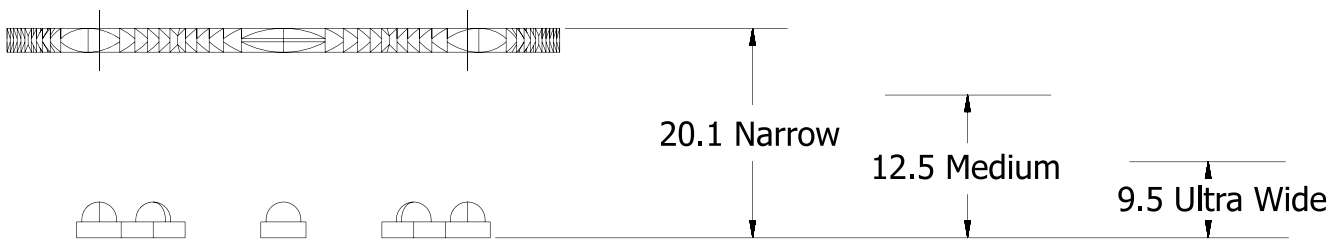


"X" Quote:

Narrow: from 19,00mm to 21,00mm (recommended 20,10mm)

Medium: from 11,50mm to 13,50mm (recommended 12,50mm)

Wide: from 8,00mm to 12,00mm (recommended 9,50 for ultra wide)

Drawing.

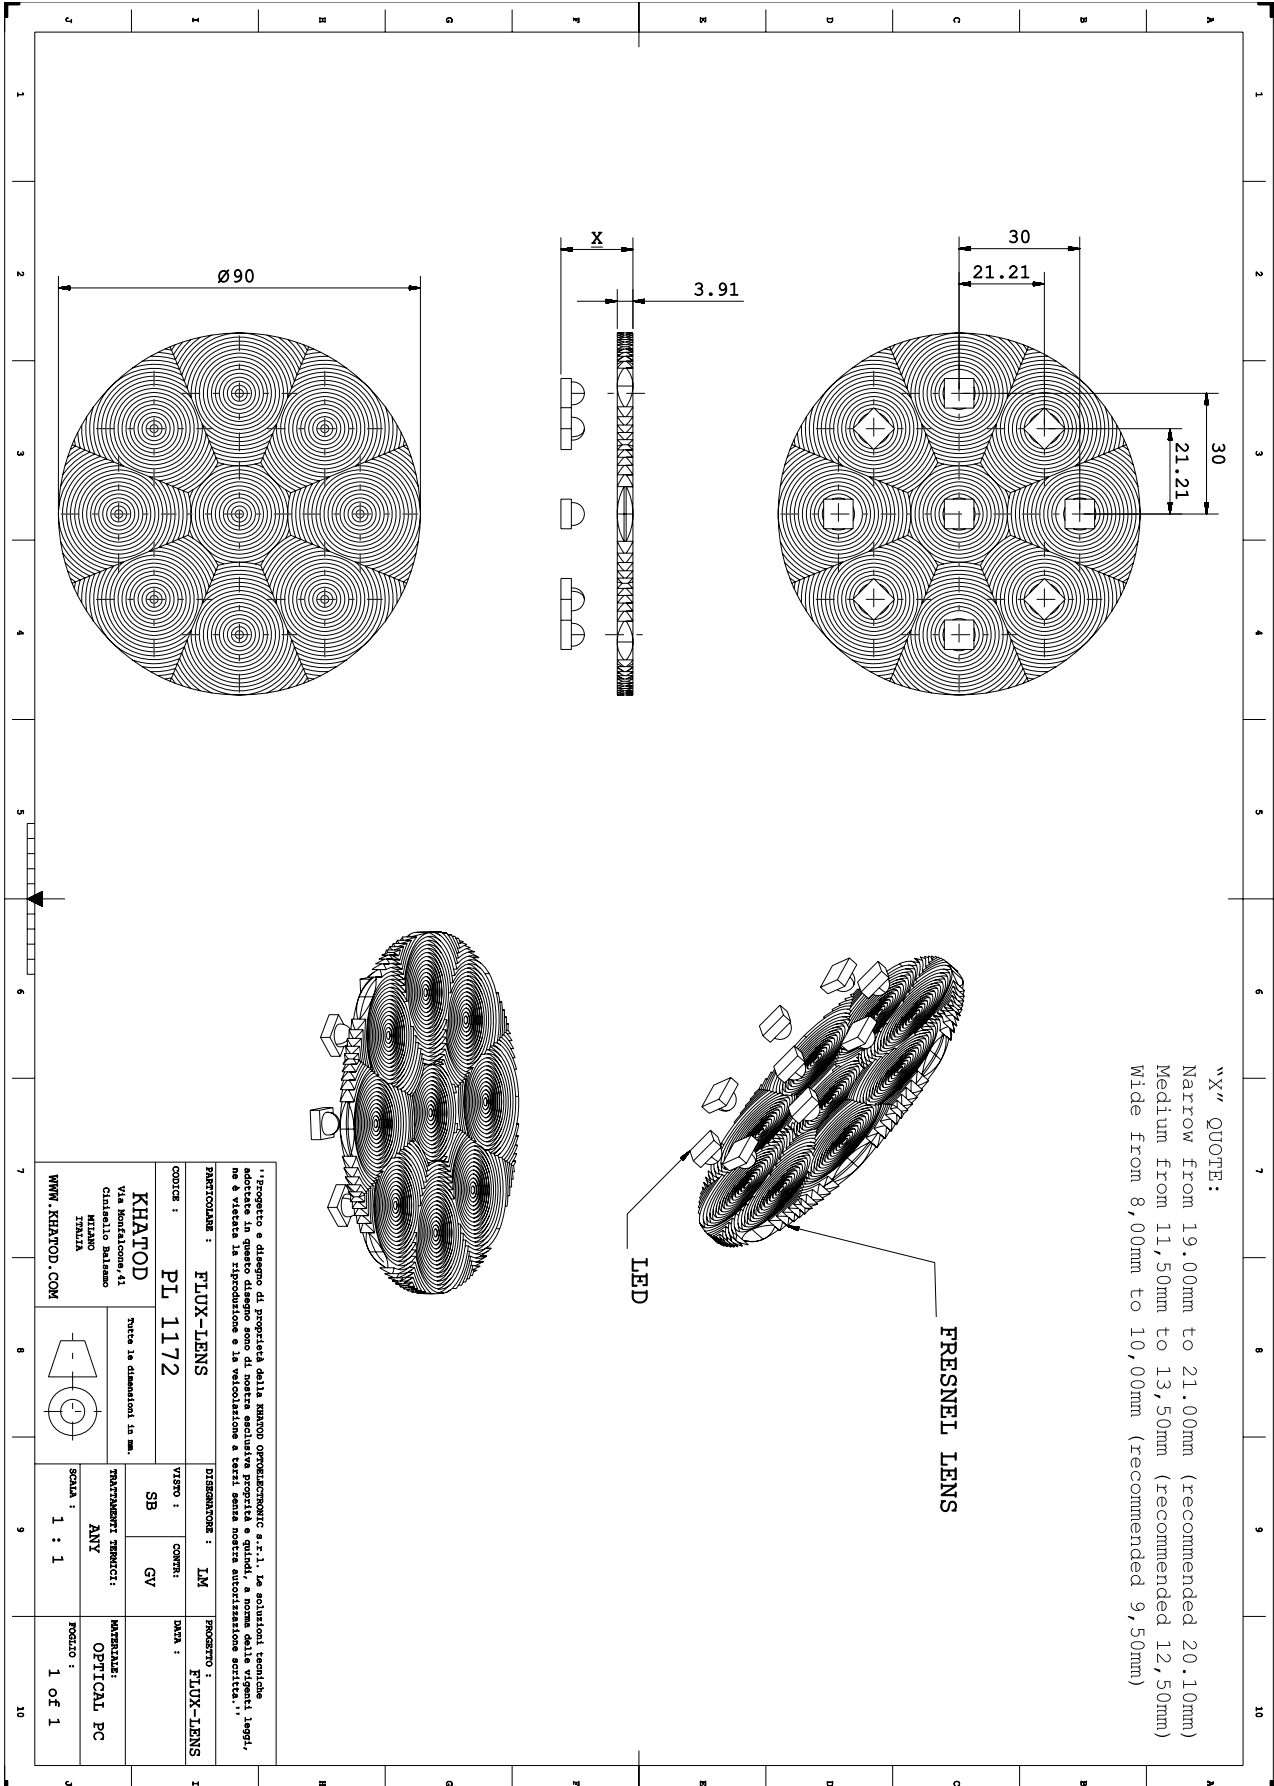

Lens characteristics

Parameter	Symbol	Rating	Unit
Lens Material	PC	--	--
Holder Material	--	--	--
Operating Temperature	Topr	-40 to +120	°C
Storage Temperature	Tstg	-40 to +120	°C
Average transmittance in visible spectrum (400 – 700nm) >90% as measured using 3mm thick Optical Grade PC			

LED characteristics

X Value is valid for any 1-3-5W lambertian LED.

Notes:

Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specification described in the section "OPTICAL CHARACTERISTICS"

- Should you require further information, please contact Khatod for advice.
- All lens testing must be subject to identical conditions as Khatod test condition.
- Published by Khatod optoelectronic srl - All the data contained in this document are the property of Khatod optoelectronic srl and may change without notice.

KHATOD LENS Use And Maintenance

- DO NOT HANDLE OR INSTALL LENSES WITHOUT WEARING GLOVES, SKIN OILS MAY DAMAGE LENS OR LIGHT TRANSMISSION
- CLEAN LENSES WITH MILD SOAP AND WATER AND A SOFT CLOTH
- DO NOT USE ANY COMMERCIAL CLEANING SOLVENTS ON LENSES

Khatod SRL, Milan, Italy, manufactures lenses for LEDs. Any other use of the lens shall void our liability and warranty. The lenses are an inert component to be used in the manufacture of various products. Our warranty and liability are limited only to the manufacture of the lens. You may not modify, copy, distribute reproduce, license or alter the lens and related materials of Khatod SRL. Khatod SRL does not warrant against damages or defects arising out of the use or misuse of the products; against defects or damage arising from improper installation, or against defects in the product or in its components. No warranty of any kind, expressed or implied, is made regarding the safety of the products. The entire risk as to the quality or performance of the product is with the buyer. In no event shall Khatod SRL or Khatod USA be liable for any direct, indirect, punitive, incidental, special, consequential damages, or any damages whatsoever arising out of or connected with the use or misuse of the product. Khatod SRL shall not have any obligation with respect to the product or any part thereof, whether based on contract, tort, strict liability or otherwise. Buyer assumes all risks and liability from use of the product. The laws of Milan, Italy govern this product warranty and liability and you hereby consent to the exclusive jurisdiction and venue of courts in Milan, Italy in all disputes arising out of or relating to the use of this product.