



KUS 389



KUS 388




KUS 387

SERIES KUS 389

Ø 3 mm LED

TYPE	EMITTED COLOUR	LUMINOUS INTENSITY			FULL VIEWING ANGLE	FORWARD VOLTAGE (IF=20 mA)		OPERATING TEMPERATURE	FORWARD CURRENT
		PEAK	TYP.	IF		TYP.	MAX		
KUS 389 - R	RED	700	5	10	120	2,0	2,5	- 55 to + 100	25
KUS 389 - Y	YELLOW	590	12,5	10	120	2,1	2,5		30
KUS 389 - G	GREEN	565	12,5	10	120	2,2	2,5		25
KUS 389 - S	SUPER RED	625	20	10	120	2,0	2,5		30
KUS 389 - B	RED/GREEN	625/565	12,5	20	100	2,0	2,5		25
KUS 389 - I	IPER RED	660	100	20	120	1,85	2,5		30
LOW CURRENT									
KUS 389 - RL	RED	625	2	2	120	1,8	2,5	- 55 to + 100	7,5
KUS 389 - YL	YELLOW	590	2	2	120	1,9	2,7		7,5
KUS 389 - GL	GREEN	565	2	2	120	1,9	2,5		7,5
KUS 389 - IL	IPER RED	660	20	2	120	1,85	2,5		7,5
QUALITY TESTED 100%	DIFFUSED	nm	mcd	mA	DEGREE°	V	V	°C	mA

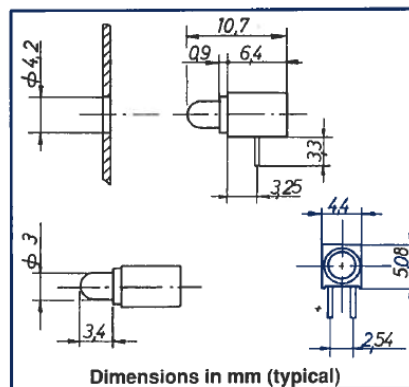


Dimensions in mm (typical)

SERIES KUS 388

Ø 3 mm LED

TYPE	EMITTED COLOUR	LUMINOUS INTENSITY			FULL VIEWING ANGLE	FORWARD VOLTAGE (IF=20 mA)		OPERATING TEMPERATURE	FORWARD CURRENT
		PEAK	TYP.	IF		TYP.	MAX		
KUS 388 - R	RED	700	5	10	120	2,0	2,5	- 55 to + 100	25
KUS 388 - Y	YELLOW	590	12,5	10	120	2,1	2,5		30
KUS 388 - G	GREEN	565	12,5	10	120	2,2	2,5		25
KUS 388 - S	SUPER RED	625	20	10	120	2,0	2,5		30
KUS 388 - B	RED/GREEN	625/565	12,5	20	100	2,0	2,5		25
KUS 388 - I	IPER RED	660	100	20	120	1,85	2,5		30
LOW CURRENT									
KUS 388 - RL	RED	625	2	2	120	1,8	2,5	- 55 to + 100	7,5
KUS 388 - YL	YELLOW	590	2	2	120	1,9	2,7		7,5
KUS 388 - GL	GREEN	565	2	2	120	1,9	2,5		7,5
KUS 388 - IL	IPER RED	660	20	2	120	1,85	2,5		7,5
QUALITY TESTED 100%	DIFFUSED	nm	mcd	mA	DEGREE°	V	V	°C	mA

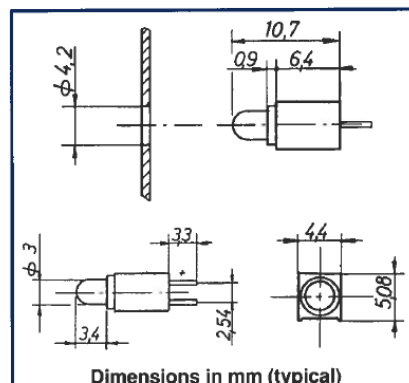


Dimensions in mm (typical)

SERIES KUS 387

Ø 3 mm LED

TYPE	EMITTED COLOUR	LUMINOUS INTENSITY			FULL VIEWING ANGLE	FORWARD VOLTAGE (IF=20 mA)		OPERATING TEMPERATURE	FORWARD CURRENT
		PEAK	TYP.	IF		TYP.	MAX		
KUS 387 - R	RED	700	5	10	120	2,0	2,5	- 55 to + 100	25
KUS 387 - Y	YELLOW	590	12,5	10	120	2,1	2,5		30
KUS 387 - G	GREEN	565	12,5	10	120	2,2	2,5		25
KUS 387 - S	SUPER RED	625	20	10	120	2,0	2,5		30
KUS 387 - B	RED/GREEN	625/565	12,5	20	100	2,0	2,5		25
KUS 387 - I	IPER RED	660	100	20	120	1,85	2,5		30
LOW CURRENT									
KUS 387 - RL	RED	625	2	2	120	1,8	2,5	- 55 to + 100	7,5
KUS 387 - YL	YELLOW	590	2	2	120	1,9	2,7		7,5
KUS 387 - GL	GREEN	565	2	2	120	1,9	2,5		7,5
KUS 387 - IL	IPER RED	660	20	2	120	1,85	2,5		7,5
QUALITY TESTED 100%	DIFFUSED	nm	mcd	mA	DEGREE°	V	V	°C	mA

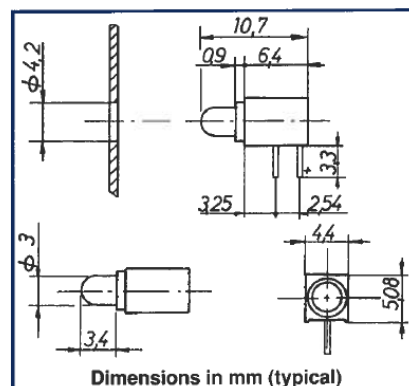

Dimensions in mm (typical)

MATERIAL SPECIFICATION

- ☞ HOUSING: BLACK NORYL, UL94 V-0
- ☞ SOLDERING TEMPERATURE: 260°C ≤ 6 sec.
- ☞ FLAMABILITY: UL 94 V-0 and acc. VDE 0304 part3
- ☞ CLIMATE: DIN 40040
- ☞ TERMINATIONS: □ 0,5 mm leads
- ☞ Mean Time Between Failure: • standard 100.000 hours • low current 250.000 hours

OPTIONS AVAILABLE

- ☞ 5 V & 12 V INTEGRATED RESISTOR
- ☞ BICOLOUR/TRICOLOUR & BIPOLAR
- ☞ BLUE OR WHITE LEDS
- ☞ ULTRABRIGHT - INFRARED & PHOTOTRANSISTORS
- ☞ LED CASE: WATER CLEAR - TRANSPARENT - WHITE
- ☞ FLAT TOP & BLINKING LEDS
- ☞ SPECIAL LEDS ON REQUEST