


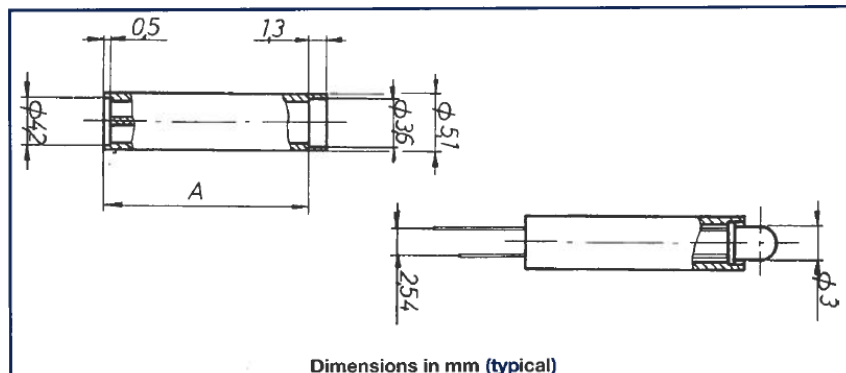

SPACER VARIABLE LENGHT

Ø 3 mm LED

WITHOUT LED	LENGHT - A	WITH LED (TECHNICAL DATA SEE PAGE ON THE SIDE)		
		RED TYPE	GREEN TYPE	YELLOW TYPE
KVD-03-035	A = 3.5 mm	KVD-03-035/R	KVD-03-035/G	KVD-03-035/Y
KVD-03-045	A = 4.5 mm	KVD-03-045/R	KVD-03-045/G	KVD-03-045/Y
KVD-03-055	A = 5.5 mm	KVD-03-045/R	KVD-03-045/G	KVD-03-055/Y
KVD-03-065	A = 6.5 mm	KVD-03-065/R	KVD-03-065/G	KVD-03-065/Y
KVD-03-075	A = 7.5 mm	KVD-03-075/R	KVD-03-075/G	KVD-03-075/Y
KVD-03-085	A = 8.5 mm	KVD-03-085/R	KVD-03-085/G	KVD-03-085/Y
KVD-03-095	A = 9.5 mm	KVD-03-095/R	KVD-03-095/G	KVD-03-095/Y
KVD-03-102	A = 10.2 mm	KVD-03-102/R	KVD-03-102/G	KVD-03-102/Y
KVD-03-110	A = 11.0 mm	KVD-03-110/R	KVD-03-110/G	KVD-03-110/Y
KVD-03-120	A = 12.0 mm	KVD-03-120/R	KVD-03-120/G	KVD-03-120/Y
KVD-03-130	A = 13.0 mm	KVD-03-130/R	KVD-03-130/G	KVD-03-130/Y
KVD-03-140	A = 14.0 mm	KVD-03-140/R	KVD-03-140/G	KVD-03-140/Y
KVD-03-150	A = 15.0 mm	KVD-03-150/R	KVD-03-150/G	KVD-03-150/Y
KVD-03-160	A = 16.0 mm	KVD-03-160/R	KVD-03-160/G	KVD-03-160/Y
KVD-03-170	A = 17.0 mm	KVD-03-170/R	KVD-03-170/G	KVD-03-170/Y
KVD-03-200	A = 20.0 mm	KVD-03-200/R	KVD-03-200/G	KVD-03-200/Y
KVD-03-230	A = 23.0 mm	KVD-03-230/R	KVD-03-230/G	KVD-03-230/Y

OTHER SIZES OR INTERMEDIATE SIZES UPON REQUEST

MATERIAL SPECIFICATION

- ◆ HOUSING: BLACK, UL94 V-0
- ◆ SOLDERING TEMPERATURE: 260 °C ≤ 6 sec.
- ◆ FLAMABILITY: UL 94 V-0 and acc. VDE 0304 part3
- ◆ DEFLECTION TEMPERATURE: 152°C
- ◆ HARDNESS (ROCKWELL): R 112
- ◆ AMBIENT TEMPERATURE: -55° to +105°C
- ◆ STORAGE TEMPERATURE: -55° to +105°C

OPTIONS AVAILABLE

- ◆ 5 V & 12 V INTEGRATED RESISTOR
- ◆ BICOLOUR/TRICOLOUR & BIPOLAR
- ◆ BLUE OR WHITE LEDs
- ◆ ULTRABRIGHT - INFRARED & PHOTOTRANSISTORS
- ◆ LED CASE: WATER CLEAR - TRANSPARENT - WHITE
- ◆ FLAT TOP & BLINKING LEDs
- ◆ SPECIAL LEDs ON REQUEST